


# SPECIFICATIONS

Item #902680

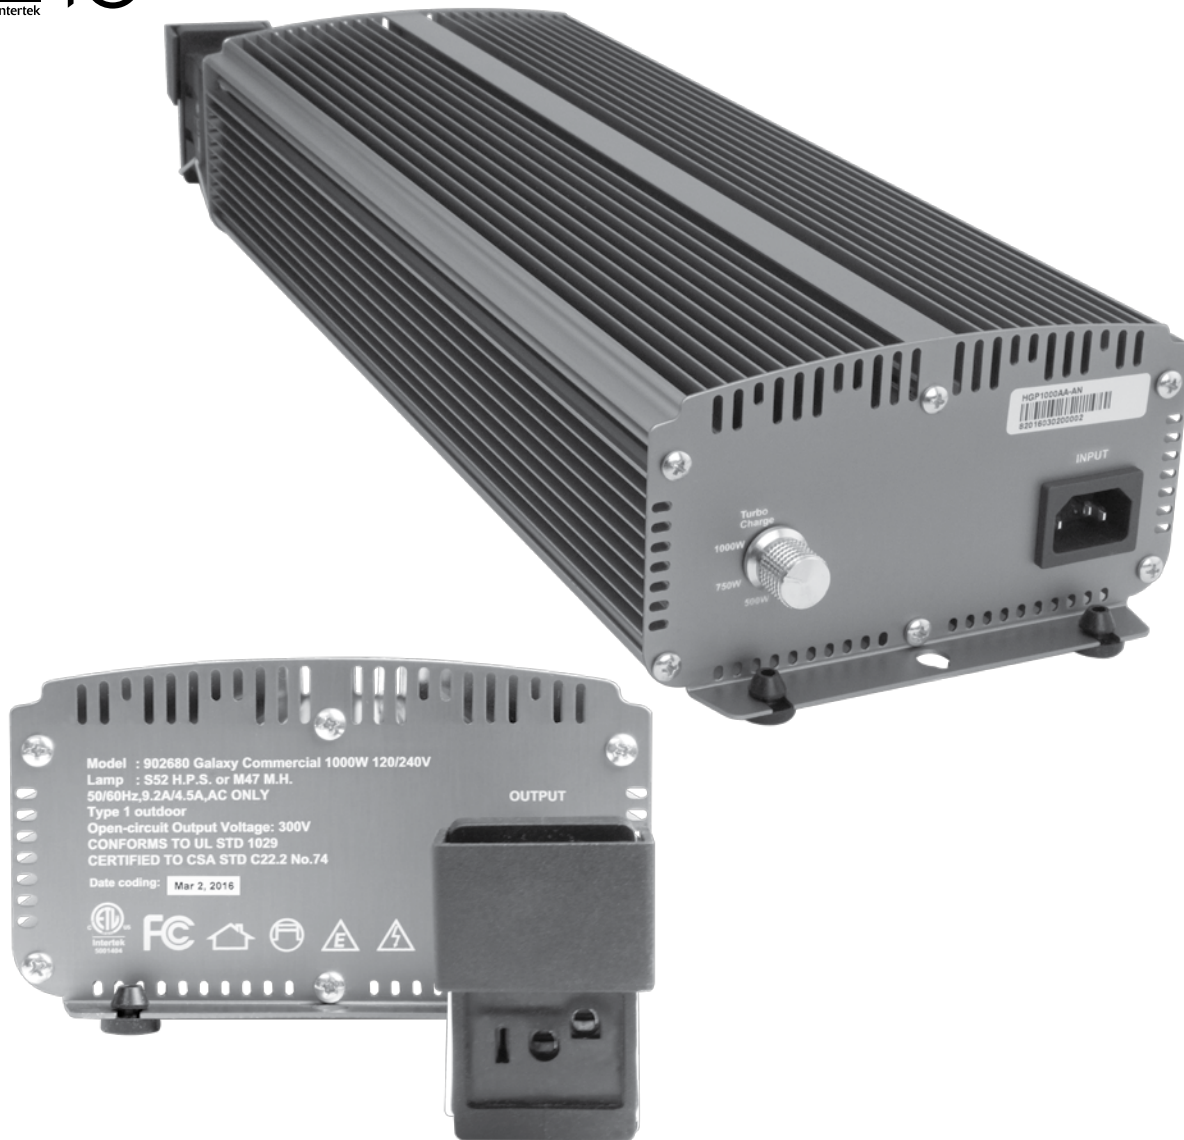

# GALAXY®

*This document is not intended to be used for installation purposes. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.*

# Galaxy® Commercial Ballast 1000 Watt 120-208-240 Volt

• = yes

•	ETL LISTED
	Tested to UL Standard #1029 Tested to CSA Standard C22.2 No. 74
•	FCC CERTIFIED
<b>LAMP COMPATIBILITY</b>	
•	HPS - <b>Max. Wattage:</b> 1000 (single-ended & double-ended)
•	MH - <b>Max. Wattage:</b> 1000 (single-ended & double-ended)
<b>TRANSFORMER VOLTAGE</b>	
•	120 / 208 / 240
	240 ONLY
	277 ONLY
	480 ONLY
<b>AMPS AT 120V POWER: 8.75</b>	
<b>AMPS AT 208V POWER: 5</b>	
<b>AMPS AT 240V POWER: 4.5</b>	
<b>AMPS AT 480V POWER: N/A</b>	
<b>POWER SOURCE Hz: 50/60</b>	
<b>POWER FACTOR (cos<math>\phi</math>): &gt; 0.99</b>	
<b>AMBIENT TEMPERATURE: 40°C</b>	
<b>TOTAL HARMONIC DISTORTION: &lt; 10%</b>	
<b>POWER CORD</b>	
•	DETACHABLE 240 VOLT (120V sold separately)
	HARD WIRED 277 VOLT w/ L7-15p TWIST LOCK PLUG
	HARD WIRED 480 VOLT - WIRE ONLY (NO PLUG)
<b>LAMP CORD RECEPTACLE COMPATIBILITY</b>	
•	DUAL UNIVERSAL
	SUN SYSTEM ONLY
<b>WARRANTY</b>	
•	2 YEAR
	3 YEAR
	5 YEAR